



# Adjusting B315/B618 APN for Cell-C

To log into the router you will need to type 192.168.8.1 into a web browser. The default username and password will be **admin/admin** but you will only be prompted for that once you select the **Settings** option.

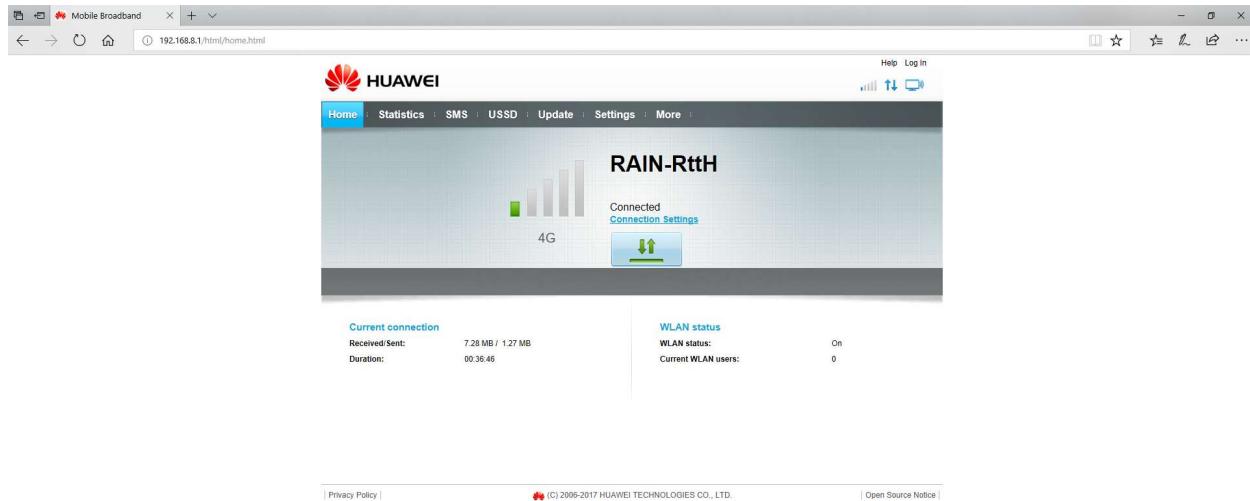


Once on this page select **Settings** and enter the above mentioned login details.

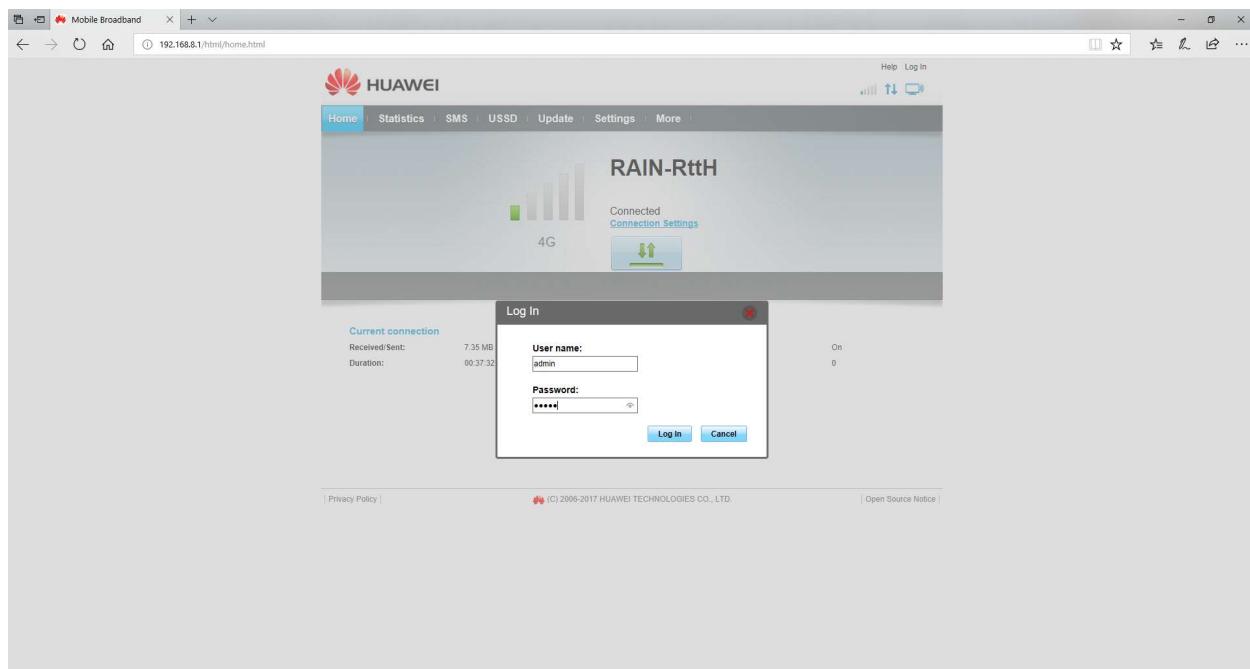


The B618 will request a password change which you can just go along with.


Once logged in you will select **Dial-Up** on the left of the screen.

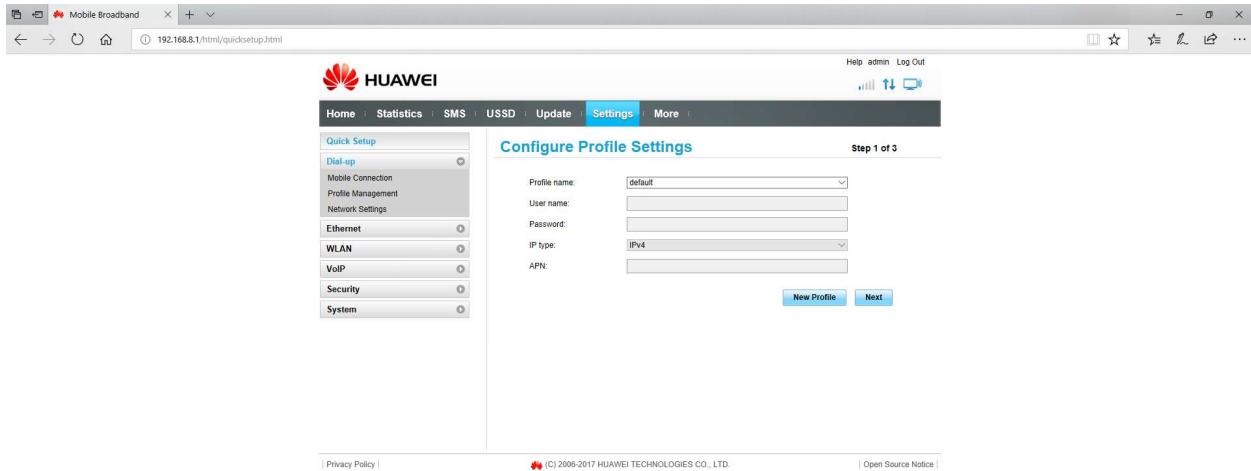

Select **Profile Management** and then **New Profile**.

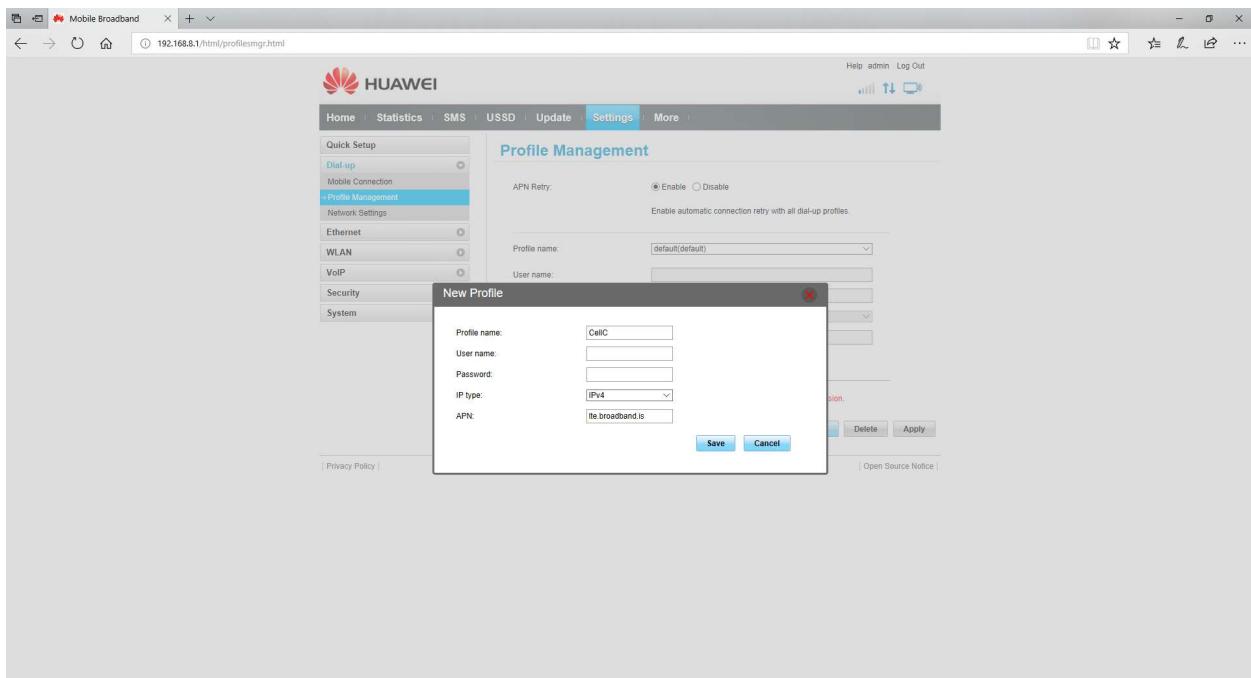

Enter a name, it's just a place holder so for short just call it CellC and then importantly enter **lte.broadband.is** in the **APN** section. After that make sure the profile is selected, then you can hit **Save** and **Apply**.

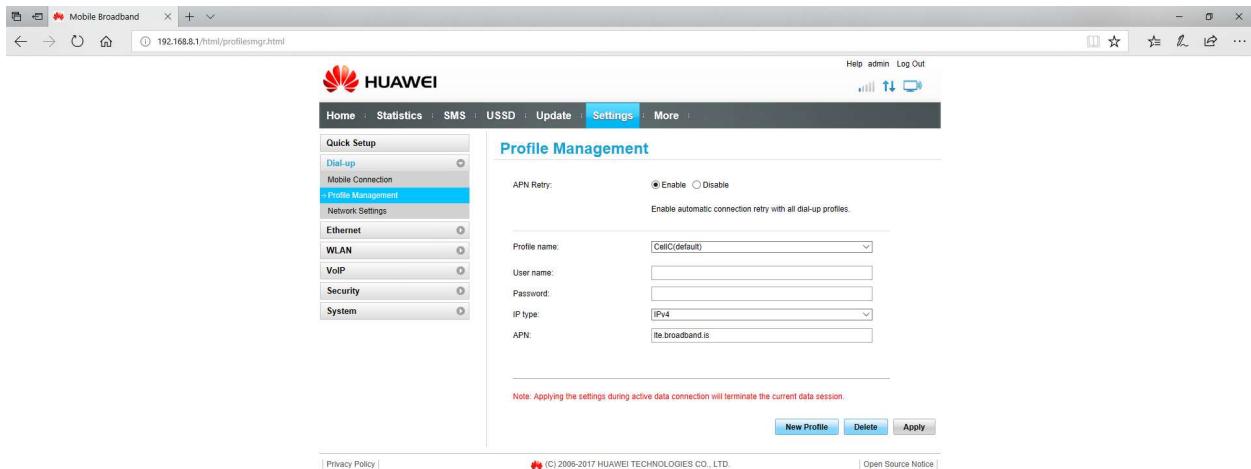

That should bring you online!